


TL120DT

Presentation:

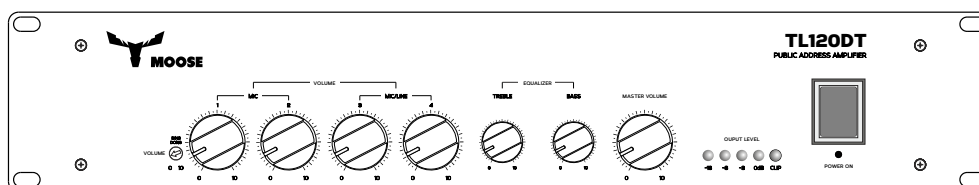

Public address amplifier designed and developed for fixed installations.


There are 2 versions available with different output powers, 120W and 220W rms, prepared for rack 19" mounting. Both TL120DT and TL200DT feature four balanced XLR 3p microphone + respective Euroblock terminal inputs plus two line inputs in RCA connector, low impedance (4-16Ohm) and high impedance (100V) outputs both in screw terminals. A built-in phantom power supply with on/off push switch is available as well as a priority microphone input in DIN 5p connector. Additionally, both models feature Slave & REC outputs in RCA connectors, 2-band equalizer and MASTER level control making of this TL120DT and TL200DT the perfect solution for all kind of public address installations.

Solid 2U - Rack 19" enclosure construction.

Features:

- High quality PA amplifier
- Installation PA mixer-amplifier
- 4 Microphone inputs with Balanced XLR
- 4 Euroblock terminal inputs
- 1 Line input in RCA
- 4-16 ohm & constant-volt. out. (70V & 100V)
- Bass and Treble tone controls
- Ding-dong and Priority muting by VOX
- Built-in electronic protection circuitry
- Solid construction for 19" rack - 2U mounting

Rear view:



Technical specifications:

Type	Professional Public address mixer-amplifier
No. of channels	4
RMS Power @ 8ohm	120W (rms)
Frequency Range	50Hz - 14kHz, ±0.3dB
T.H.D.	< 1.0% @ 1kHz
S/N ratio	> 90dB @ 1kHz
Zones	No
Controls	Bass, Treble, Master, volume for MIC & LINE in
Indicators	Power on, Signal and Clip
Inputs	Microphone, Line
Outputs	4-16 ohm, 100V
Connectors	Input (XLR 3p, Euroblock), Link (RCA) & REC (RCA)
Phantom Power	Output: touch-proof binding post
Other features	Ding-dong, priority MIC, MIC/LINE switch
AC connectors	IEC
Protections	Thermal overload, short circuit, temperature control
Operating Voltage	220-240V AC (factory configured), 50-60 Hz
Power consumption	150VA
Cooling	Continuous speed fan, 80mm / 230V AC
Dimensions	2RU space, 345mm (13.58in) depth
Weight	11Kg 24.25lb

