




MOOSE
www.mooseaudio.com

PROUDLY DEVELOPED AND
MANUFACTURED IN PORTUGAL

TL6Z

Public address mixer-amplifier
6 Independent zones, 6x 150W

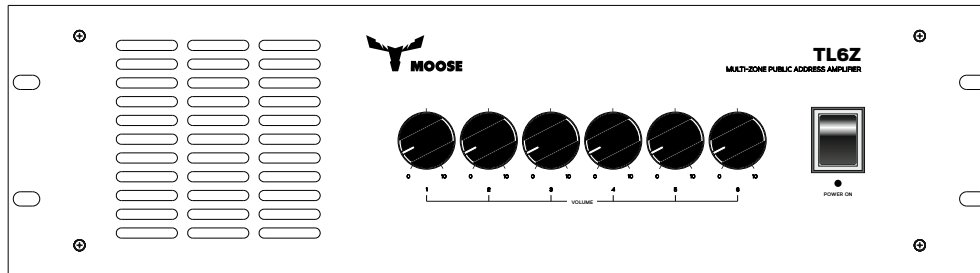

Presentation:

Public address amplifier with 6 independent channels/inputs delivering each input 150W rms. This amplifier features 6 independent balanced audio inputs with independent volume controls on the front panel, each input in Jack 6.5mm and 6 outputs in high impedance 100V line transformer with binding-post. It is equipped with an advanced protection circuit which protects against DC short circuit and overload when necessary for better performance on both fixed and mobile public address installations, being the perfect choice for supermarkets, warehouses, medical centres, etc, where there is a need to control each zone independently.


Features:

- High quality PA amplifier
- Multizone installation PA amplifier
- Jack 6,35mm microphone inputs (six)
- Constant-voltage outputs (100V)
- Independent zone control (six)
- Individual volume control on the front panel
- Built-in electronic protection circuitry
- Solid construction for 19" rack - 3U mounting

Technical specifications:

MODEL	TL6Z
Type	Public address mixer-amplifier
Power output (RMS)	6x 150W
Frequency range	50Hz - 15kHz
T.H.D. (20Hz - 20kHz)	< 1% @ 1kHz
S/N Ratio	> 90dB @ 1kHz
Zones	6 independent zones
Controls	Input channel/volume
Indicators	Power on
Inputs	Signal in
Outputs	High impedance 100V line transformer
Connectors	Input (6.3mm Jack) Output: touch-proof binding post
Phantom power	No
Other features	Priority signal source scheme
Protections	Short circuit, thermal overload
Operating voltage	230V AC (factory config.), 50-60Hz
Power consumption	900VA
Cooling	Continuously speed fan, 120mm / 230V AC
Dimensions (WxDxH)	3RU spaces, 460mm depth
Weight	23Kg

Other pictures:

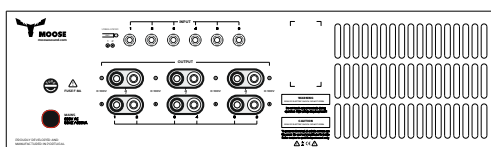

Rear panel

