




**MOOSE**  
www.mooseaudio.com

PROUDLY DEVELOPED AND  
MANUFACTURED IN PORTUGAL

# TL4Z800

Public address mixer-amplifier  
4 Independent zones, 4x 200W

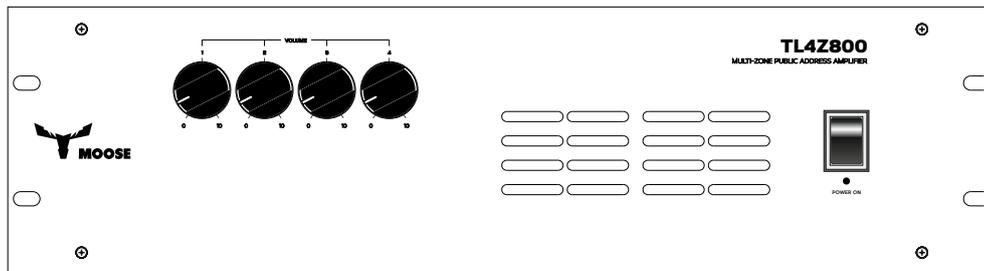

## Presentation:

Public address amplifier with a power up to 800W. The PA4Z800 features 4 independent audio inputs performed using Jack 6.5mm with individual volume control on the front panel. The output signal is available on 4 high impedance 100V mono output zones of 200W with binding-post on the rear panel. It is equipped with an advanced protection circuit which protects against DC short circuit and overload when necessary. The PA4Z800 is designed for public address installations such as supermarkets, warehouses, petrol stations, etc, where there is a need to control each zone independently.


## Features:

- High quality PA amplifier
- Multizone installation PA amplifier
- Jack 6.35mm microphone inputs (four)
- Constant-voltage outputs (100V)
- Independent zone control (four)
- Individual volume control on the front panel
- Built-in electronic protection circuitry
- Solid construction for 19" rack - 3U mounting

## Technical specifications:

<b>MODEL</b>	TL4Z800
Type	Multizone PA mixer-amplifier
Power output (RMS)	4x 200W
Frequency range	50Hz - 15kHz
T.H.D. (20Hz - 20kHz)	< 1% @ 1kHz
S/N Ratio	> 90dB @ 1kHz
Zones	4 independent zones
Controls	Input channel/volume
Indicators	Power on
Inputs	Signal in
Outputs	High impedance 100V line transformer
Connectors	Input (6.3mm Jack)
	Output: touch-proof binding post
Phantom power	No
Other features	Independent zone control
Protections	Short circuit, thermal overload
Operating voltage	230V AC (factory config.), 50-60Hz
Power consumption	800VA
Cooling	Continuously speed fan, 120mm / 230V AC
Dimensions (WxDxH)	3RU spaces, 420mm depth
Weight	21Kg

## Other pictures:

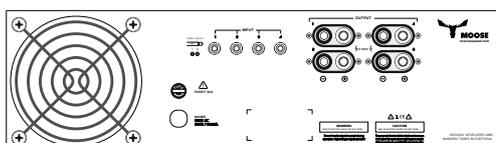

Rear panel

