


TL6ZT

Presentation:

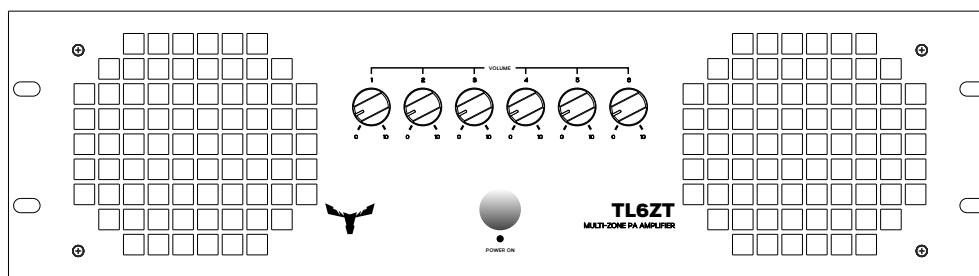

The TL6ZT is a Public address amplifier with 6 independent channels/inputs delivering each input 150W rms.


This amplifier features 6 independent balanced audio inputs with independent volume controls on the front panel, each input in balanced XLR 3p microphone + respective Euroblock terminal inputs and 6 outputs in high impedance 100V line transformer with binding-post. It is equipped with an advanced protection circuit which protects against DC short circuit and overload when necessary for better performance on both fixed and mobile public address installations, being the perfect choice for supermarkets, warehouses, medical centres, etc. where there is a need to control each zone independently.

Solid construction for 19" rack - 3U mounting

Features:

- High quality PA amplifier
- Multizone installation PA amplifier
- 4 Microphone inputs with Balanced XLR
- 4 Euroblock terminal inputs
- Constant-voltage outputs (100V)
- Independent zone control (six)
- Individual volume control on the front panel
- Built-in electronic protection circuitry
- Solid construction for 19" rack - 3U mounting

Rear view:

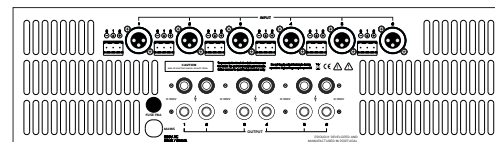

Technical specifications:

| | |
|-------------------|--|
| Type | Professional PA mixer-amplifier |
| No. of channels | 6 (six) |
| RMS Power @ 8ohm | 150W (rms) per channel |
| Frequency Range | 50Hz - 15kHz, ±0.3dB |
| T.H.D. | < 1.0% @ 1kHz |
| S/N ratio | > 90dB @ 1kHz |
| Zones | 6 (six) |
| Controls | Master volume |
| Indicators | Power on, Signal |
| Inputs | Microphone |
| Outputs | High impedance, 100V |
| Connectors | Input: XLR 3p, Euroblock terminals Output: touch-proof binding post |
| Phantom Power | N/A |
| AC input | AC cable |
| Protections | Thermal overload, short circuit, temperature control |
| Operating Voltage | 220-240V AC (factory configured), 50-60 Hz |
| Power consumption | 900VA |
| Cooling | Continuous speed fan, 120mm / 230V AC |
| Dimensions | 3RU space, 460mm (18.11in) depth |
| Weight | 23Kg 50.71lb |

