


## Presentation:

The Installation series speakers is the right choice to anyone that wants to install loudspeakers into a wall or into a ceiling matching the high quality sound requirements for modern indoor spaces. Extremely compact, accurate and good looking the 2-way speakers can also be complemented with a number of MOOSE subwoofer systems. This I8 incorporates high quality EU transducer combined with an extremely high sensitivity and lower distortion Kapton 1" driver for outstanding detail and clarity in high frequencies without harshness.

All speakers feature an internal passive crossover designed to deliver neutral and natural sound and a line transformer can be installed (optional). The I8 speaker features Euroblock + dual NL4 connector parallel-connected for an easy and flexible installation regardless the surroundings and pole-mount socket which can be easily pole mounted wherever you need.

This I8 is prepared to be wall mounted having two types of mounting brackets available, one for vertical (portable) and another for horizontal installation (permanent) depending on the application and location. The I series range is available matched to any RAL colour suited for a variety of venues including restaurants, bars, clubs, retail shops, exhibition centers, fitness centers, conference rooms ensuring maximum speech intelligibility, precise band coverage and ease of installation thanks to the flexible mounting hardware solutions, wall and "U" brackets.

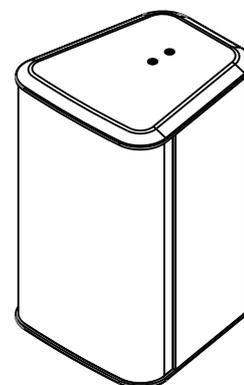

## Features:

- 2-way passive installation speakers
- Elegant, refined and lightness design
- 8" (1.46in) FR EU transducer
- High sensitivity 1" HF Kapton driver
- Euroblock terminal + dual NL4 speakon
- Optional line transformer, 100V - 8ohm / 15W / 30W power taps
- Prepared for wall/ceiling mounting, 4x M6 inserts
- 4x M5 inserts for Wall mount support adjustable in 2 axes (optional)
- Ø35mm pole mount socket
- Rugged and durable 12mm birch plywood


## Technical specifications:

### Acoustical

Type	2-way passive installation speaker
Enclosure design	Bass reflex, trapezoidal
Power rating (RMS/Program)	170W / 340W
Frequency range	70 - 20kHz
Nominal impedance	8 ohm
Transducer type	8" FR (1.46in) EU transducer 1" HF (1.00in) Kapton EU transducer
Dispersion	60°x40° (HxV)
Crossover frequency	2200Hz
SPL (1W/1kHz)	119dB @ 1m
Sensitivity	90dB
Connector	Euroblock speaker terminal + dual NL4 speakon I8T: 100V line transformer, 8ohm / 15W / 30W power taps

### Mechanical

Enclosure	12mm birch plywood, rugged polyurea coating
Grille	Custom perforated metal grilles w/ acoustic foam
Color	Black or white textured
Hardware	4x M6 inserts for "U" bracket (supplied), Ø35mm pole mount socket 4x M5 inserts for wall mount/ceiling support, 2-axes (optional)
Dimensions	240x255x394mm   9.45x10.04x15.51in
Weight	8.0Kg   17.64lb

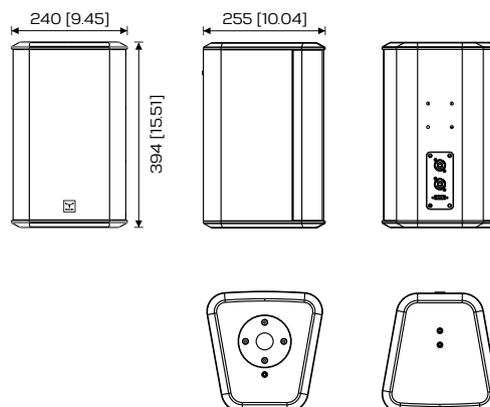

Dimensions in mm [in]