

HL18


Presentation:

The HL series is a horn-loaded subwoofer range designed to satisfy the need for an extreme high-SPL sub bass loudspeaker system for use in applications requiring accurate and powerful reproduction of low frequency energy at very high levels.

This HL18 incorporates one high performance 18" extended LF Neodymium transducer (4in voice coil) with high heat dissipation to allow the subwoofer to produce a continuously high SPL over a long time, increased program power handling and lower power compression delivering a uniform and stable frequency response at all power levels.


The enclosure is constructed from 18mm plywood having a rugged and durable polyurea coating, equipped with recessed carrying handles and stacking feet. The cabinet is prepared to fit heavy duty wheels to aid in handling and transportation.

The HL series is engineered to provide maximum output with minimal distortion and smooth extended low frequency response and thanks to its long throw range, accuracy, high definition bass reproduction, the HL18/HL218 is suited for both fixed and mobile systems, nightclubs, large scale concert touring and festival applications integrated into line array applications.

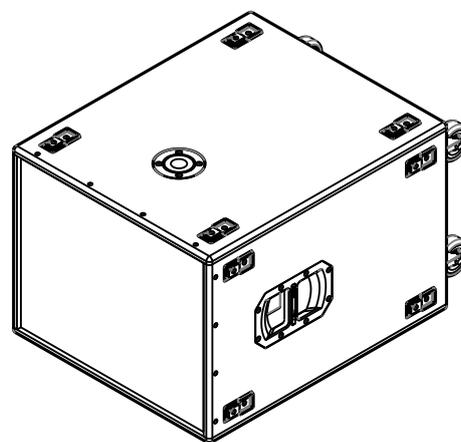

Features:

- Single horn-loaded subwoofer
- High power density, high level output
- Excellent "punch", extended Low frequency
- 1x 18" (4in VC) Neodymium EU transducer (high excursion)
- Extended sub frequency response to 30 Hz
- 2x NL4 parallel-connected
- Rugged and durable 18mm birch plywood construction
- Black textured Polyurea coating
- Powder coated custom perforated steel grille
- Recesses on the top to facilitate the stacking
- Heavy duty wheel casters on the back (optional)

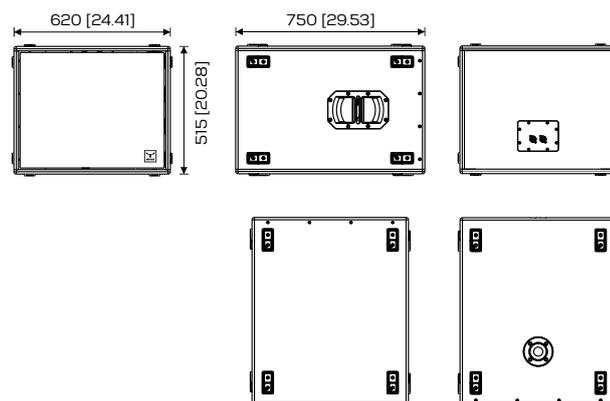

Dimensions in mm [in]

Technical specifications:

Acoustical

Type	Compact passive subwoofer
Enclosure design	Horn-loaded
Power rating (RMS/Peak)	1200W / 7000W
Frequency range	34 - 190Hz (-6dB)
Nominal impedance	8Ohm
Transducer type	1x 18" LF (4in VC) EU transducer
Crossover frequency	30Hz Butterworth 18dB (low cut filter)
SPL (1W/1kHz)	136dB @ 1m
Sensitivity	98dB
Connector	2x NL4, parallel-connected

Mechanical

Enclosure	18mm birch plywood, rugged polyurea coating
Grille	Custom perforated metal grilles w/ acoustic foam
Color	Black or white textured
Hardware	4 rubber feet, 1 side handle Ø35mm pole mount socket Prepared for stacking
Dimensions	620x750x515mm 24.41x29.53x20.28in
Weight	44Kg 9700lb

