

CS5

Presentation:

This CS5 is a public address speaker for ceiling applications featuring a quick mounting system to allow quick installation.

It features a 5" high quality full range loudspeaker and an integrated 70V/100V 'matching transformer' allowing multiple CS5 to be connected together without danger of overloading the power amplifier (to avoid impedance drop).

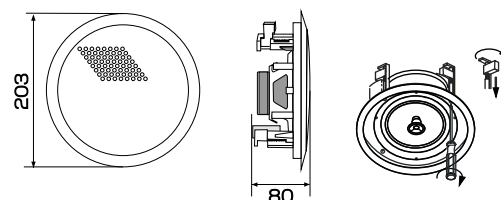
The speaker offers power tapping, 1.5W (3k2 ohm) and 3W (1k6 ohm) in 70V and 3W (3k3 ohm) and 6W (1k6 ohm) in 100V.

Made of lightweight yet resistant ABS plastic, this speaker has a metal grille with powder coated iron mesh.

Offering a very clean design this CS5 is the perfect solution for all kind of public address installations, designed to offer an economic but professional solution to contractors, suited for audio installations as shops, shopping malls, supermarkets, medical centers, and small rooms.

Features:

- Public address installation speaker
- Ultra slim and clean design
- 5" FR transducer
- Suitable for 70V & 100V high imp. installations
- Quick mounting system
- ABS plastic housing
- Powder coated iron mesh grille

Technical specifications:**Acoustical**

Type	Public address ceiling speaker
Transducer type	5" FR transducer
Power taps (100V)	6W (1k6 ohm)/3W (3k3 ohm).
Power taps (70V)	3W (1k6 ohm)/1.5W (3k2 ohm).
Frequency range	110Hz - 18kHz
Coverage	150° @ 1kHz, 70° @ 4kHz
Sensitivity	88dB
Max. SPL	95dB
Connections	Wiring (power taps)

Mechanical

Colour	RAL9016
Housing	ABS plastic
Grille	Powder coated iron mesh
Mounting dimensions	Ø170x30mm (cut-out)
Dimensions	Ø203x80mm
Weight	700g 1.54lb