

I206

Presentation:

The I206 is a versatile, 2-way coax high performance, powerful yet compact loudspeaker suited for a wide range of pro audio applications.


The speaker incorporates a 6" (2.0/1.0in VC) rubber surround COAX LF transducer and a 6" (2.0in VC) FR which combined provide linearity and consistent power handling.

Moreover, this combination exhibits smooth power response resulting in extremely natural voicing, exceptional clarity for speech and program reproduction and increased lower bass extension.

The enclosure is 15mm birch plywood manufactured, painted in hard-wearing and durable polyurea coating equipped with a powder coated steel, foam-backed grill.

It is designed to work in both vertical and horizontal planes featuring 6x M8 threaded nuts to fit "U" brackets. There is also a Ø35mm pole mount socket on the bottom to make it suitable for a wide range of applications and venues.

With a visually unobtrusive and discreet design, the I206 is designed for background and foreground music, sound reinforcement systems, full-range PA, Corporate events, AV rooms and for distributed sound applications allowing its installation very close to walls and ceilings.

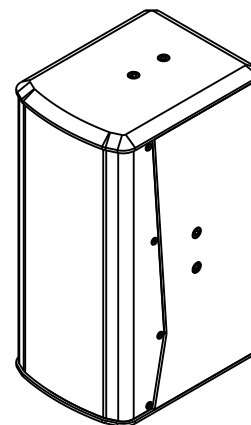

Features:

- Compact passive 2-way, COAX speaker
- Front loaded enclosure
- 6" (2.0/1.0in VC) rubber surround COAX transducer
- 6" (3.0in VC) LF transducer
- Conical directivity, 70° axisymetrical
- Euroblock 4p + 2x NL4, parallel-connected
- Integrated M8 threaded nuts for U-brackets (H&V)
- Ø35mm pole mount socket
- Rugged and durable 15mm birch plywood
- Powder coated custom perforated steel grille


Technical specifications:

Acoustical

Type	2-way coax passive speaker
Enclosure design	Front loaded, bass-reflex
Power rating (RMS/Peak)	420W / 1600W
Frequency range	75 - 18kHz (-10dB)
Nominal impedance	8ohm
Transducer type	6" coax (2.0/1.0in VC) FR EU transducer 6" (2.0in VC) LF EU transducer
Dispersion (HxV)	70°x70°
Crossover frequency	2.8kHz
SPL (1W/1kHz)	127dB @ 1m
Sensitivity	94dB
Connector	Euroblock 4p / Speakon NL4, in/out

Mechanical

Enclosure	15mm birch plywood, rugged polyurea coating
Grille	Custom perforated metal grilles w/ acoustic foam
Color	Black or white textured
Hardware	6x M8 inserts for "U" brackets (WB206H & WB206V) Ø35mm pole mount adapter (PMA206)
Dimensions	190x250x420mm 7.48x9.84x16.54in
Weight	13Kg 28.66lb

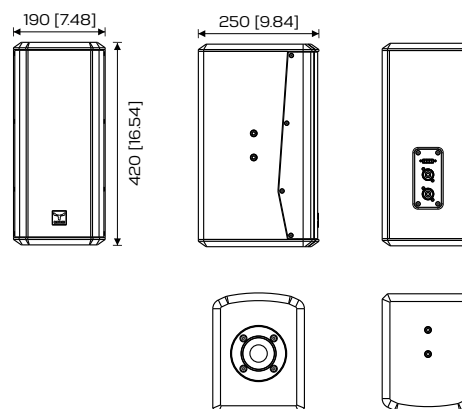

Dimensions in mm [in]