

Presentation:


The Installation series speakers is the right choice to anyone that wants to install loudspeakers into a wall or into a ceiling matching the high quality sound requirements for modern indoor spaces.

This I10 incorporates a 10" (1.73in VC) high quality EU transducer combined with an extremely high sensitivity and lower distortion Kapton 1" driver for outstanding detail and clarity in high frequencies without harshness.

It features a connector plate with a 4p Euroblock + dual NL4 connector and an internal passive crossover designed to deliver neutral and natural sound for an easy and flexible installation regardless the surroundings.

This I10 is prepared to be wall mounted having two types of mounting brackets available, vertical and horizontal, offering a built-in pole-mount socket as well.

The I series range presents extremely compact, accurate and good looking 2-way speakers that can also be complemented with a number of MOOSE subwoofer systems. It is suited for a variety of venues including restaurants, bars, clubs, retail shops, exhibition centers, fitness centers, conference rooms ensuring maximum speech intelligibility, precise band coverage and ease of installation.

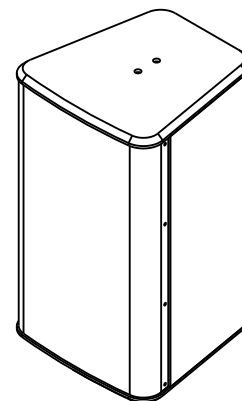

Features:

- 2-way passive installation speaker
- Elegant, refined and lightness design
- 10" (1.73in) FR EU transducer
- High sensitivity 1" HF Kapton driver
- Bi-radial horn, 60°x40° dispersion
- Euroblock terminal + dual NL4 speakon
- Prepared for wall/ceiling mounting
- 2x M8 inserts for Wall mount bracket
- Ø35mm pole mount socket
- Rugged and durable 15mm birch plywood


Technical specifications:

Acoustical

Type	2-way passive installation speaker
Enclosure design	Bass reflex, trapezoidal
Power rating (RMS/Program)	250W / 500W
Frequency range	60Hz - 18kHz (-6dB)
Nominal impedance	8 ohm
Transducer type	10" FR (1.73in) EU transducer 1" HF (1in) Kapton EU driver
Dispersion (HxV)	60°x40°
Crossover frequency	3800Hz
SPL (1W/1kHz)	123dB @ 1m
Sensitivity	94dB
Connector	Euroblock speaker terminal + dual NL4 speakon

Mechanical

Enclosure	15mm birch plywood, rugged polyurea coating
Grille	Custom perforated metal grilles w/ acoustic foam
Color	Black or white textured
Hardware	2x M8 inserts for "U" bracket (optional) Ø35mm pole mount socket
Dimensions	325x330x550mm 12.79x12.99x21.65in
Weight	12Kg 26.46lb

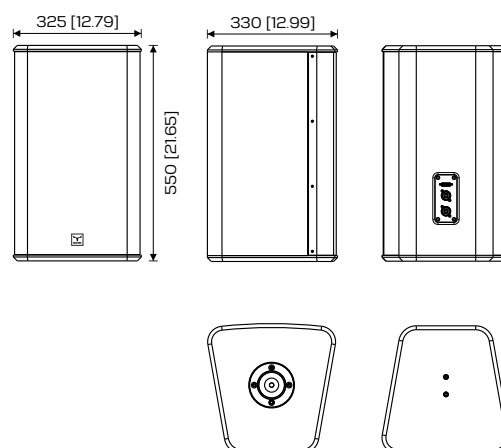

Dimensions in mm [in]