

Presentation:


The Installation series speakers is the right choice to anyone that wants to install loudspeakers into a wall or into a ceiling matching the high quality sound requirements for modern indoor spaces.

This I12 incorporates a 12" (2.56in VC) high quality EU transducer combined with a 1" (0.98in VC) HF driver coupled to a 90°x60° (user-rotatable) resulting in a superb sound and exceptional performance.

It features a connector plate with a 4p Euroblock + dual NL4 connector and an internal passive crossover designed to deliver neutral and natural sound for an easy and flexible installation regardless the surroundings.

This I12 is prepared to be wall mounted having two types of mounting brackets available, vertical and horizontal, offering a built-in pole-mount socket as well.

The I series range presents extremely compact, accurate and good looking 2-way speakers that can also be complemented with a number of MOOSE subwoofer systems. It is suited for a variety of venues including restaurants, bars, clubs, retail shops, exhibition centers, fitness centers, conference rooms ensuring maximum speech intelligibility, precise band coverage and ease of installation.

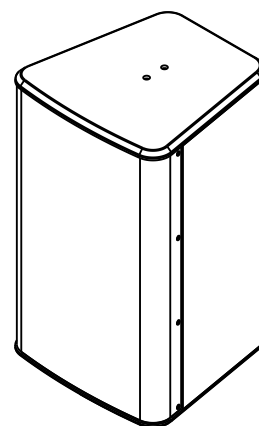

Features:

- 2-way passive installation speaker
- Elegant, refined and lightness design
- 12" (2.56in) FR EU transducer
- 1" (0.98in VC) HF EU driver
- CD horn 90°x60° for ideal dispersion
- Euroblock terminal + dual NL4 speakon
- Prepared for wall/ceiling mounting, 4x M6 inserts
- 2x M8 inserts for Wall mount bracket
- Ø35mm pole mount socket
- Rugged and durable 15mm birch plywood


Technical specifications:

Acoustical

Type	2-way passive installation speaker
Enclosure design	Bass reflex, trapezoidal
Power rating (RMS/Program)	340W / 680W
Frequency range	55Hz - 18kHz (-6dB)
Nominal impedance	8 ohm
Transducer type	12" FR (2.56in) EU transducer 1" (0.98in) HF EU EU transducer
Dispersion (HxV)	90°x60°
Crossover frequency	2500Hz
SPL (1W/1kHz)	125dB @ 1m
Sensitivity	97dB
Connector	Euroblock speaker terminal + dual NL4 speakon

Mechanical

Enclosure	15mm birch plywood, rugged polyurea coating
Grille	Custom perforated metal grilles w/ acoustic foam
Color	Black or white textured
Hardware	2x M8 inserts for "U" bracket (optional) Ø35mm pole mount socket
Dimensions	365x365x600mm 14.37x14.37x23.62in
Weight	17Kg 37.48lb

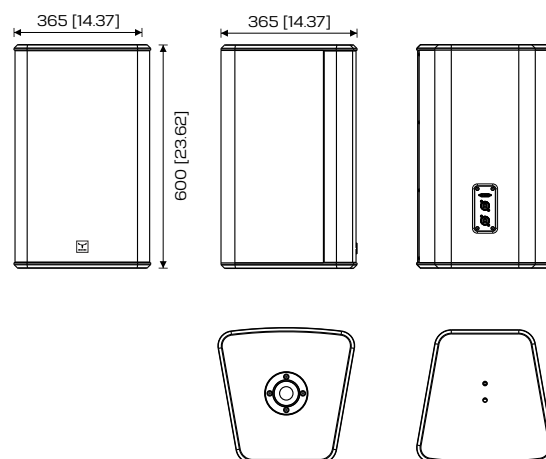

Dimensions in mm [in]

