

iX5

Presentation:


The IX5 is a new member of the Installation series speakers, the right choice to anyone that wants to install loudspeakers into a wall or into a ceiling matching the high quality sound requirements for modern indoor spaces.

Extremely compact, accurate and good looking the IX5 incorporates a high quality 5" COAX EU transducer with a 70° axisymetrical dispersion pattern to obtain a smooth frequency response maintaining constant coverage and directivity.

The IX5 speaker features 2x NL4 parallel-connected and a 4p Euroblock connector prepared to make any contractor or installer life's easier.


Phisically the IX5 is prepared to be wall mounted having 2x M6 inserts on the sides and a 3/8" insert on the bottom that allows the speaker to be mounted on a microphone stand.

The I series range is available matched to any RAL colour suited for a wide variety of venues including restaurants, bars, clubs, retail shops, exhibition centers, fitness centers, conference rooms ensuring maximum speech intelligibility, precise band coverage and ease of installation thanks to the flexible mounting hardware solutions.

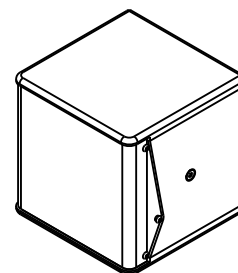

Features:

- 5" COAX installation speaker
- Compact, seamless design
- 5" coax, LF 1.5in VC + HF 1in VC, EU transducer
- Faithful dynamic response and great range
- 2x NL4 speakon, Euroblock terminal in/out
- Integrated 3/8" insert for microphone stand
- Prepared for wall/ceiling mounting, 2x M6 inserts
- Rugged and durable 12mm birch plywood construction
- Powder coated custom perforated steel grill

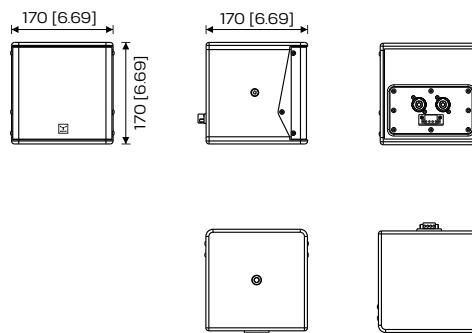

Dimensions in mm [in]

Technical specifications:

Acoustical

Type	2-way passive installation speaker
Enclosure design	Bass reflex, cube-shaped
Power rating (RMS/Program)	150W/20W 300W/40W
Frequency range	90 - 20kHz (-10dB)
Nominal impedance	16 ohm
Transducer type	5" COAX FR EU transducer 1.5" LF VC + 1" HF VC
Dispersion	70° axisymmetric
Crossover frequency	3000Hz
SPL (1W/1kHz)	120dB @ 1m
Sensitivity	93dB
Connector	2x NL4, parallel-connected Euroblock speaker terminal in/out

Mechanical

Enclosure	12mm birch plywood, rugged polyurea coating
Grille	Custom perforated metal grilles w/ acoustic foam
Color	Black or white textured
Hardware	2x M6 inserts for "U" bracket (supplied) 1x 3/8" insert for microphone stand
Dimensions	170x170x170mm 6.69x6.69x6.69in
Weight	4.0Kg 8.81lb

