




**MOOSE**  
www.mooseaudio.com

PROUDLY DEVELOPED AND  
MANUFACTURED IN PORTUGAL

# TL260Z

Public address mixer-amplifier  
6 Independent zones, 260VA

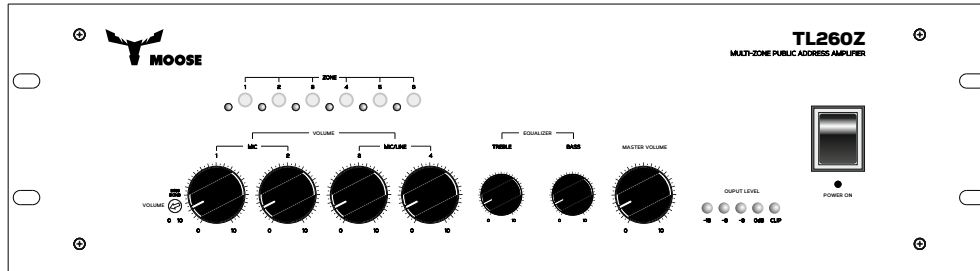


## Presentation:

Public address amplifier with a power up to 300W rms. The TL260Z offers a variety of input possibilities for all kinds of connection purposes such as 4 balanced MIC inputs, 2 stereo line inputs which are switchable between MIC/LINE level and a priority MIC input (with ding-dong) performed using a 5-pin DIN connector. The output signal is available in low impedance 4-16Ohm and high impedance 100V mono output zones with terminal blocks on the rear panel and the TL260Z also features a REC and SLAVE (pre-amp) outputs in RCA connector. All control functions such as volume controls, master volume control, channel selection and a 2-band tone control are located on the front panel. It is equipped with an advanced protection circuit which protects against DC short circuit and overload when necessary.

## Features:

- High quality PA amplifier
- Multizone installation PA mixer-amplifier
- 4 Microphone inputs and 1 Line input
- 4-16 ohm & constant-volt. out. (70V and 100V)
- Independent zone control switches (six)
- Bass and Treble tone controls
- Ding-dong and Priority muting by VOX
- Built-in electronic protection circuitry
- Solid construction for 19" rack - 3U mounting

## Other pictures:

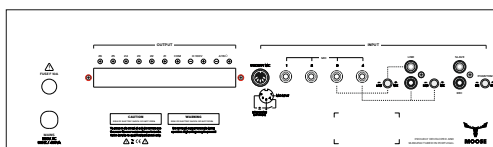

Rear panel

## Technical specifications:

MODEL	TL260Z
Type	Public address mixer-amplifier
Power output (RMS)	260W
Frequency range	50Hz - 15kHz
T.H.D. (20Hz - 20kHz)	< 1% @ 1kHz
S/N Ratio	> 90dB @ 1kHz
Zones	6 zones
Controls	Bass, Treble, Master, Volume for MIC and LINE
Indicators	Power on, Signal and Clip, Active zone
Inputs	Microphone, Line in
Outputs	4-16 ohm., 100V line transformer, REC
Connectors	Input: 6.3mm Jack, RCA line Output: touch-proof binding post
Phantom power	+48V DC
Other features	Ding-dong, Priority MIC, MIC/LINE 3/4 switches
Protections	Short circuit, thermal overload
Operating voltage	230V AC (factory config.), 50-60Hz
Power consumption	260VA
Cooling	Continuously speed fan, 120mm / 230V AC
Dimensions (WxDxH)	3RU spaces, 420mm depth
Weight	16Kg

